


Total thickness	EN ISO 24346 [EN 428]	mm	7.8
Thickness of wearlayer	EN ISO 24340 [EN 429]	mm	0.7 + polyurethane
Weight	EN ISO 23997 [EN 430]	psf (lbs/sq ft)	1.96
Tile size	EN ISO 24342 (EN 427)	Inches	18 x 18 "
CLASSIFICATION			
Norm / Product specification	-	-	ENISO 10582 EN 6491
European classification	EN ISO 10874 [EN 685]	class	34 / 43
Fire rating	EN 13 501-1	class	B _{fl} -s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance	DIN 51130	class	R9/R11
PERFORMANCE			
Wear resistance	EN 660.2	mm ³	≤ 3
Wear group	NF 189	group	P
Dimensional stability	EN ISO 23999 [EN 434]	%	≤ 0.20 NO CURLING
Residual indentation	EN ISO 24343-1 [EN 433]		≤ 0.05
Castor chair test (type W)	ISO 4918 (EN 425)	-	NO CHANGE
Shore hardness	EN ISO 868	HA	≥ 9 ₂
Thermal conductivity	EN ISO 10456 (EN12524)	W/(m.K)	0.25
Colour fastness	EN 20 105- B02	degree	≥ 6
Surface treatment	-	-	PUR+
Chemical products resistance	EN ISO 26987 [EN 423]	-	OK
ENVIRONMENTAL ACCREDITATIONS			
TVOC after 28 days	ISO 16000-6	µg/m ³	< 100
Certification	-	-	Floorscore®
TECHNICAL ACCREDITATIONS			



BRE-Green Guide Ratings A+

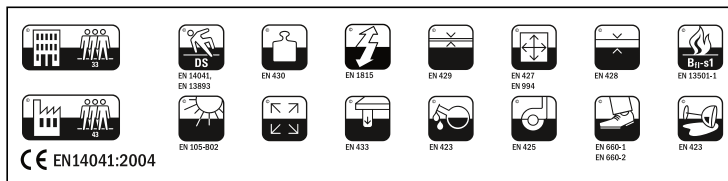